

# Böttcherin FL-40

## Ink Dissolver

Böttcherin FL-40 is used to remove dried-on ink residues from machine components.

*Application*

- flash point approx. 40 °C
- high ink dissolving performance
- removes encrusted ink
- medium evaporating
- no residues after drying process
- free of aromatics

*Features*


Apply Böttcherin FL-40 with a rag to the machine parts to be cleaned. After that, wash down parts with water.

During application, care has to be taken to avoid that Böttcherin FL-40 comes into contact with printing plates or plastic parts (e. g. monitors), because incompatibilities cannot be excluded.

*Note*

Wear protective gloves during application.



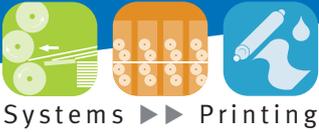

Systems ▶▶ Printing



-  10 litre can
-  20 litre can
-  200 litre drum

*Package*

Böttcherin FL-40 is classified and marked in accordance with EC - Directive 1999/45/EC - in its latest version.

*Marking*

All our product information sheets, as well as our contact data you will find on the internet [www.boettcher-systems.com](http://www.boettcher-systems.com).


### Felix Böttcher GmbH & Co. KG

#### Headquarter

Stolberger Str. 351 - 353  
 50933 Cologne, Germany  
 Phone +49 (0) 221 4907 - 1  
 Fax +49 (0) 221 4907 - 435  
[koeln@boettcher-systems.com](mailto:koeln@boettcher-systems.com)



[www.boettcher.de/contact](http://www.boettcher.de/contact)

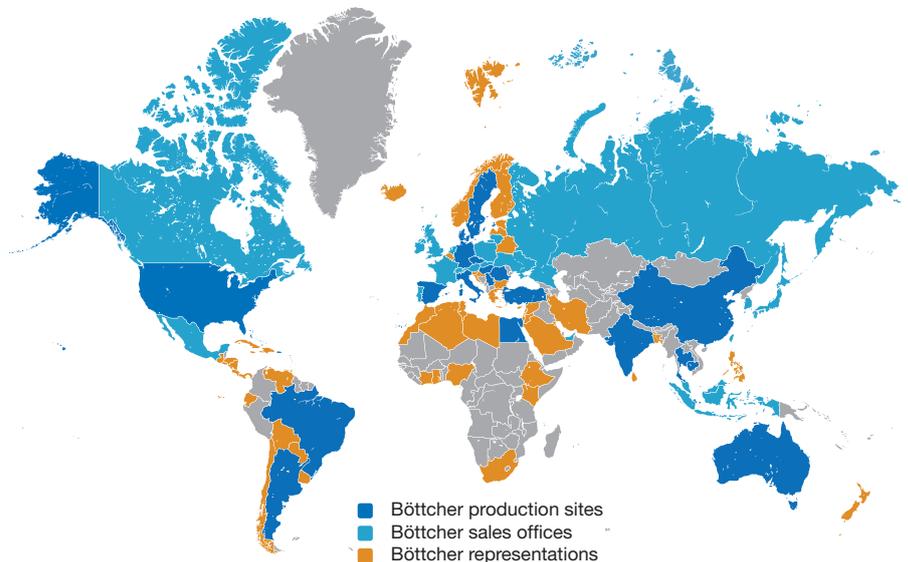

The purpose of these technical data is to assist our customers. We list general experience and laboratory test. Translation of these to actual applications is, however, subject to a variety of factors which are beyond our control. We ask for understanding that claims can not be based upon them.