















BöttcherFount N-1006 G

Fountain Solution Additive

BöttcherFount N-1006 G is a fountain solution additive with increased conservation for newspaper printing. For all types of presses and dampening units. Especially recommended for turbo dampening units.

Application

-  dosage range 2 – 3 % volume
-  fast runoff, therefore less waste
-  very stable ink-/ water-balance
-  less residual moisture in the paper
-  wide dampening range with reduction in water setting
-  reduced build-up ink on dampening rollers
-  reduced build-up of paper dust and ink on the blanket
-  no ink feedback in the dampening solution
-  corrosion inhibited
-  increased prevention of the plate
-  for water hardness 5 to 20° dH (total hardness)
-  pH-value 4,7 – 4,9 (depending on water hardness)
-  increased conductivity per % input: 370 µS/cm
-  density 1,10 (kg/l)

Features

Before applying BöttcherFount N-1006 G, the fountain system must be completely emptied and cleaned thoroughly, preferably with BöttcherPro Hydroclean.

BöttcherFount N-1006 G meets the requirements of the press manufactures' "Corrosion Certificate of Fountain Solution Additive", approved by press manufactures.

Note





- 200 kg drum
- 600 kg container
- 1000 kg container

Package

BöttcherFount N-1006 G is classified and marked according to EC-Directive 1999/45/EC - in its latest version. BöttcherFount N-1006 G is not a dangerous good in the sense of national and international transport regulations.

Marking

All our product information sheets, as well as our contact data you will find on the internet www.boettcher-systems.com.


Felix Böttcher GmbH & Co. KG

Headquarter

Stolberger Str. 351 - 353
50933 Cologne, Germany
Phone +49 (0) 221 4907 - 1
Fax +49 (0) 221 4907 - 435
koeln@boettcher-systems.com



www.boettcher.de/contact

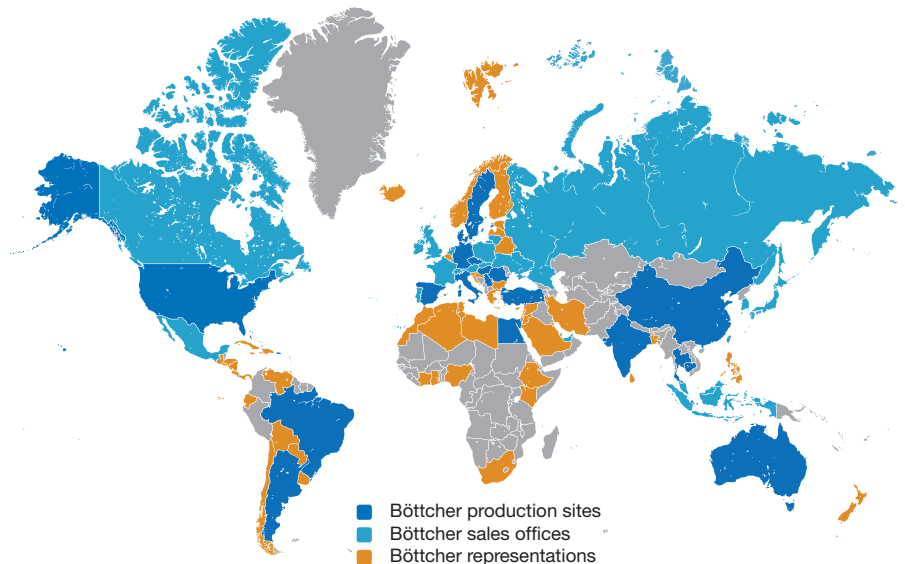

The purpose of these technical data is to assist our customers. We list general experience and laboratory test. Translation of these to actual applications is, however, subject to a variety of factors which are beyond our control. We ask for understanding that claims can not be based upon them.